

Features & Benefits

UL 10b & 10C Fire Rating
 20 minute to 3 hour rating
 Hose stream test

MIL-SAMIT
 Part 1 - .30 Cal M80 - 25 shots

UL 752
 Level 1 - 9mm - 3 shots
 Level 2 - .357 Magnum - 3 shots
 Level 3 - .44 magnum - 3 shots
 Level 4 - .30 Caliber - 1 shot
 Level 5 - 7.62mm - 1 shot
 Level 6 - 9mm - 5 shots
 Level 7 - 5.56mm - 5 shots
 Level 8 - 7.62mm - 5 shots
 Supplementary Shotgun - 12
 gauge Buckshot & Slug



NIJ 0108.01
 Level I - .22 long Rifle - 5 shots
 - .38 Special - 5 shots
 Level II - .357 Magnum - 5 shots
 - 9mm - 5 shots
 Level III - 7.62mm - 5 shots
 Level IIIA - .44 Magnum - 5 shots
 - 9mm - 5 shots
 Level IV - .30-06 A. P. - 1 shot

ASTM F1233
 HG1 - .38 Special - 3 shots
 HG2 - .357 Magnum 3 shots
 HG3 - 9 mm - 3 shots
 HG4 - .44 Magnum - 3 shots
 R1 - .223 (5.56mm) - 3 shots
 R2 - .30-'06 - 3 shots
 R3 - .308 Winchester - 3 shots
 R4-AP - .30-06 A. P. - 1 shot
 SH1 - Shotgun Buck Shot - 1 shot
 SH2 - Shotgun Slug - 3 shot
 SMG - Submachine Gun 9mm 3 shots



www.deansteel.com

Deansteel Manufacturing's latest commitment to meeting the security demands of our customers. Samples as tested by Close Focus Research as part of the Military Handbook - Design Guidelines for Physical Security of Facilities.

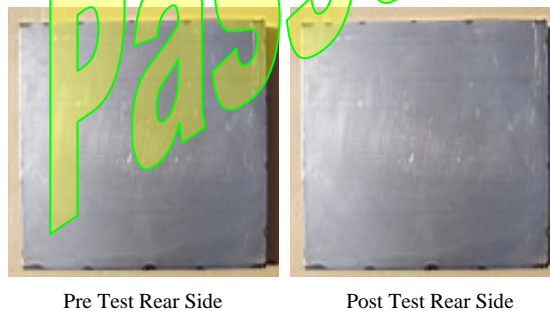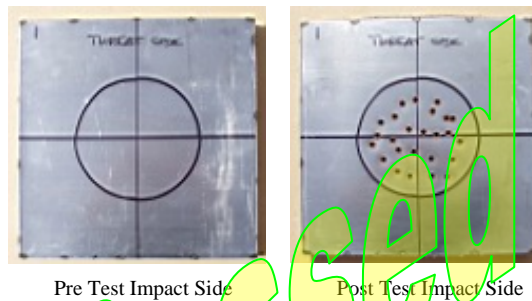

MIL-SAMIT Part 1 - .30 cal 7.62 NATO M80
 25 shots in an 8 inch circle.
 Sample Size - 16 x 16 x 1.83 inches

Deansteel has manufactured ballistic doors and frames for over 10 years, but due to increasing security threats around the world we've expanded our research and development of new ballistic products over the past two years. We now offer a full line of custom engineered bullet resistant doors, frames, and windows to suit many applications.

All of our BR products have been tested by Southwest Research Institute to the full threat spectrum mitigated by Underwriters Laboratories Standards for Bullet Resisting Equipment (UL-752), NIJ Standard 0108.01-Ballistic Resistant Protective Materials, and ASTM F1233 - Ballistic Criteria.

This innovative product line will be backed up by Deansteel's commitment to the highest quality products, attentive customer service, and "small business style" relationships. For all of your security needs trust Deansteel BRP.

Ballistic Resistance

- o Military Small Arms Multiple Impact Threat
- o Underwriters Laboratories - 752 Ballistic Standards Levels 1 - 8
- o National Institute of Justice - 0108.01
- o American Society for Testing and Materials - F1233

Test Certification

Complete test reports certifying full compliance with the agency requirements listed above are available. Tests for our door and frame assemblies were conducted by an independent testing laboratory.

Fire Protection

Underwriters Laboratories - 10b & 10c Positive Pressure Fire Tests of Door and Frame assemblies capable of a 20 minute through a 3 hour rating. Door sizes range from 4'0 x 8'0 on a single swing and 8'0 x 8'0 on a pair of doors.

Frame Profile & Door Design

Door designs are available in Flush, Vision, and Narrow light configurations. Frame profiles can be custom engineered to suit your architectural needs including specialty items such as pass thrus & windows.

Ballistic Resistant Wood Doors



Now Available!